

# Acadia™ Paver



## Harmony and Refinement

Noble and elegant, this paver is a harmonious blend of natural stones.

## Qualities and Characteristics

- Choice of four colors.
- 2 3/4" thick.
- Four different paver shapes.
- Modular or runner installation.
- 12" x 12" paving stone on a separate cube.
- Natural finish.
- Blends well with Appalachian, Sutton and Laurentian wallstones.



# BOLDUC

Fashioned in line with nature!

# Acadia™ Paver

## COLORS



Sandy Gray



Sandhill Beige



Ashen Beige



Indiana Beige

**NOTE:**

We recommend that you use actual samples to make your final choice.

## VARIATION IN PAVER LENGTH

HEIGHT X WIDTH X LENGTH in.	cm	NUMBER OF PIECES	
		/ft <sup>2</sup>	/m <sup>2</sup>
<b>Module 1</b>			
1. 2 3/4 x 3 15/16 x 7 7/8	7 x 10 x 20	2.32	25
2. 2 3/4 x 7 7/8 x 7 7/8	7 x 20 x 20		
3. 2 3/4 x 7 7/8 x 11 13/16	7 x 20 x 30		



Pavers nos. 1, 2, 3 are available on a same cube.  
Paver no. 4 is alone on a cube which gives the option to lay soldier courses or simply install a 12 x 12 pattern.

## DIMENSIONAL TOLERANCES †

Permissible dimensional tolerances under the CSA A231.2 standard are as follows:


Length:	±1/16 in (-1 mm to +2 mm)
Width:	±1/16 in (-1 mm to +2 mm)
Height:	±1/8 in (±3 mm)

## THICKNESS: 2 3/4 in. (7 cm)

## PHYSICAL CHARACTERISTICS †

COMPRESSIVE STRENGTH**	DURABILITY TO FREEZE-THAW CYCLES WITH UTILISATION OF DE-ICING SALTS**	WATER ABSORPTION
7250 psi (50 MPa) after 28 days' conditioning	Maximum loss of mass in saline solution (NaCl 3%) : • 0.74oz/ft <sup>2</sup> (225 g/m <sup>2</sup> ) after 28 cycles • 1.64oz/ft <sup>2</sup> (500 g/m <sup>2</sup> ) after 49 cycles	5% maximum

## Installation Patterns

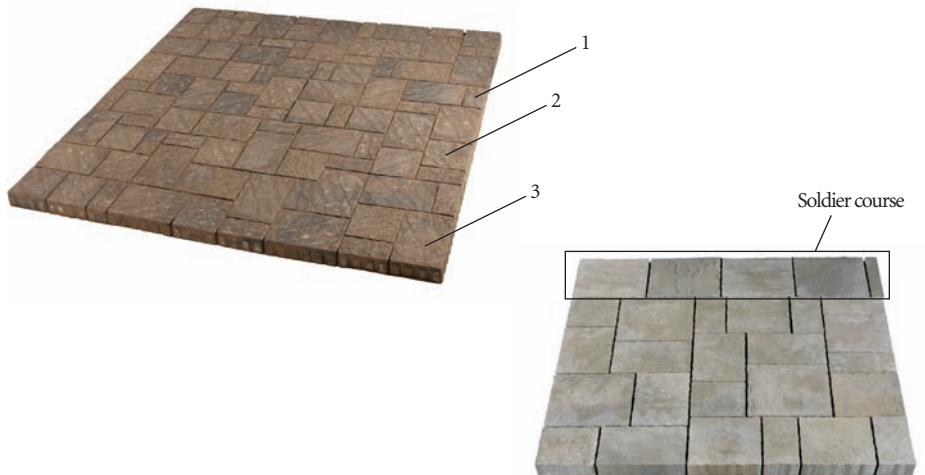

† Laboratory test reports available on request  
\*\* Tested under CSA A231.2 standard

**BOLDUC**  
Concrete product manufacturer  
1358-2nd Street, Industrial Park, P.O. Box 608,  
Sainte-Marie, Beauce, Québec, Canada G6E 3B8

Sainte-Marie: (418) 387-2634  
Québec: (418) 692-0855  
Toll free Canada: 1-800-463-8966  
Toll free USA: 1-800-603-5567  
Fax: (418) 387-6438  
www.bolduc.us  
info@bolduc.us